




BOUNDARY WALL  
(Scale 1:50)

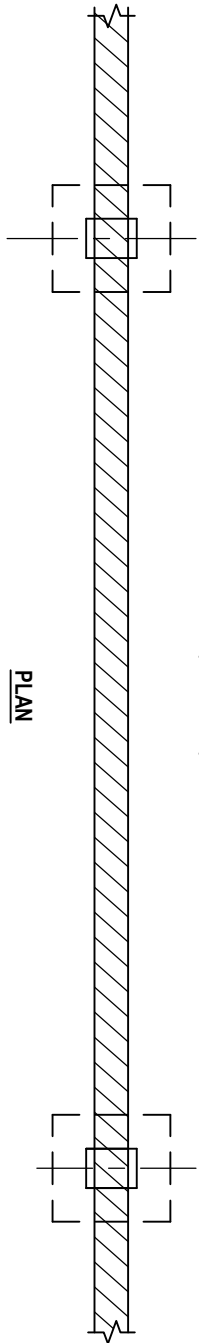



PLAN

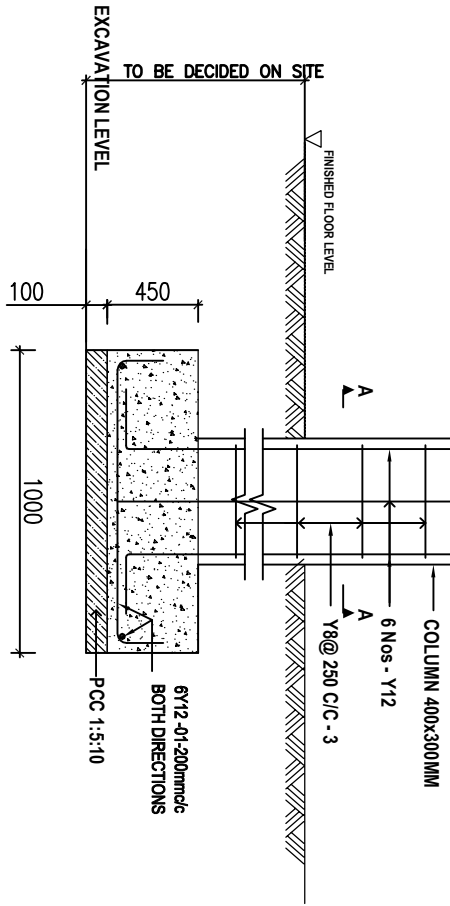


SECTION

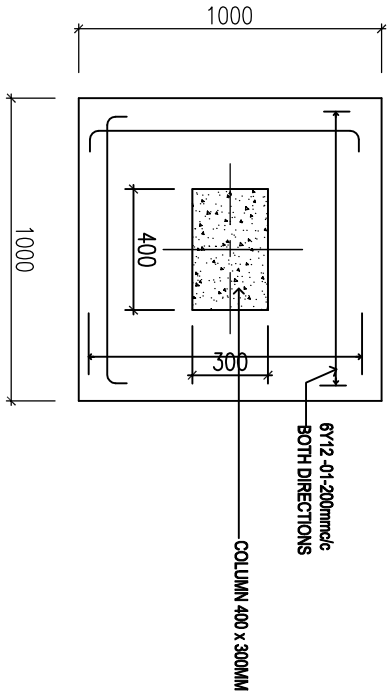

PLAN  
(Scale 1:50)

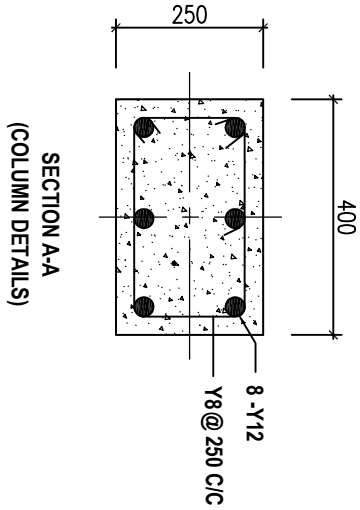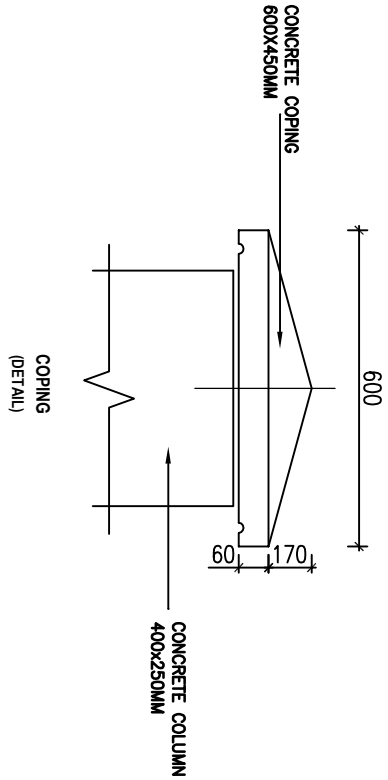

SECTION A-A  
(COLUMN DETAILS)

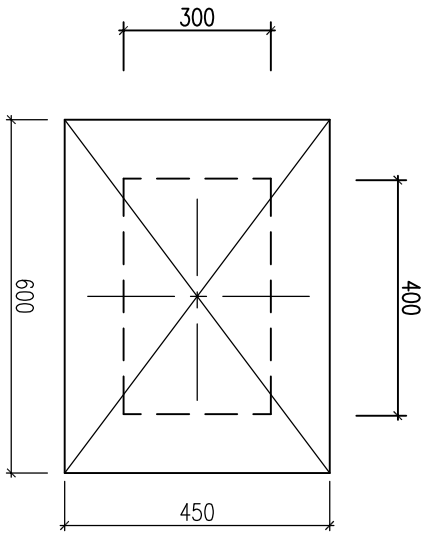

SECTION B-B

- GENERAL NOTES**
1. CONCRETE COVER TO REINFORCEMENT SHALL BE MAINTAINED BY USE OF CEMENT MORTAR COVER BLOCKS.
  2. REPORT ANY DISCREPANCIES FOUND TO THE CONCERNED AUTHORITIES.
  3. CLEAR COVER TO STEEL SHALL BE AS FOLLOWS:--
    - FOR COLUMN 40MM
    - FOR FOOTING 50MM
  4. ALL LAPS FOR ALL BARS SHALL BE 50 TIMES THE DIA OF THE BAR UNLESS OTHERWISE SPECIFIED.
  5. ALL CONCRETE WORK SHALL BE MACHINE MIXED AND MACHINE VIBRATED.
  6. STRUCTURAL CONCRETE TO BE 1:11/2:3 – 20MM AGGREGATE.
  7. ALL CONSTRUCTION WORK IS TO COMPLY WITH THE LATEST K.B.S. STANDARD CODES OF PRACTICE, LOCAL AUTHORITY BY-LAWS AND FIRE REGULATIONS.
  8. READ ONLY FIGURED DIMENSIONS.
  9. EXPANSION JOINT TO BE CREATED AT 20M.
  10. ALL DIMENSIONS ARE IN MM.

REV.	BY	DATE	APPR.														
A				B		C		D		E		F		G		H	